


GLOBE-UAV GMBH

BOIKWEG 24 . 33129 DELBRÜCK . GERMANY

PHONE +49 2944 97 383 0

INFO@G-UAV.COM . G-UAV.COM

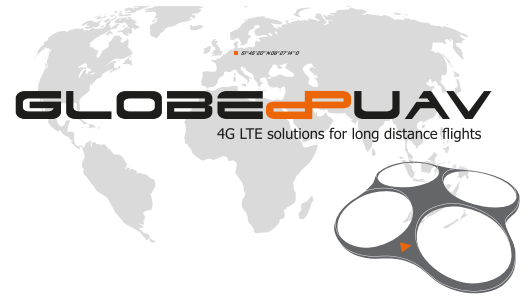

TECHNICAL DATA



GIMBAL SYSTEM VIEWPOINT	SPECS
FEATURES	
NUMBER OF AXES:	3
VIDEO TRANSMISSION (RESOLUTION @FPS):	1920 x 1080 @ 30 - 1080p FULL HD 1280 x 720 @ 30 - 720p HD
RECORDING IN THE DRONE:	1080p FULL HD
PHOTO (MPIX):	12
SUPPORTED FORMATS:	VIDEO: MP4 PHOTO: JPG
DIGITAL ZOOM:	--
OPTICAL ZOOM:	12x
PHOTOSENSITIVITY (COLOR):	0.005LUX @ F1.5
PHOTOSENSITIVITY (BW):	0.0005LUX @ F1.5
IR LASER LIGHTING:	MAX. RANGE OVER 500 M
IR LIGHT ANGLE (CLOSE RANGE):	70° UP TO 40 M
IR LIGHT ANGLE (WIDE RANGE/TELE):	2° TO ABOUT 500 M
AUTO OBJECT TRACKING:	INTEGRATED
GEOTAGGING:	INTEGRATED
WEIGHT (G):	1200

DRONE SYSTEMS

COMPATIBILITY



GUAV 4	GUAV 8	GUAV 4L	GUAV 8L
<input type="checkbox"/> PICA	<input type="checkbox"/> IXON	<input checked="" type="checkbox"/> AQUILA	<input checked="" type="checkbox"/> CEPTOR

4G LTE HIGH SPEED COMMUNICATION WITH UNLIMITED RANGE

(MISTAKES OR TECHNICAL MODIFICATIONS UNDER RESERVE.)